




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>7</sup> : <b>A61B 1/267</b>		A1	(11) International Publication Number: <b>WO 00/33727</b>
			(43) International Publication Date: 15 June 2000 (15.06.00)
(21) International Application Number: PCT/EP99/09468		(81) Designated States: AU, CA, JP, US, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).	
(22) International Filing Date: 3 December 1999 (03.12.99)			
(30) Priority Data: 09/205,217 4 December 1998 (04.12.98) US		Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.	
(63) Related by Continuation (CON) or Continuation-in-Part (CIP) to Earlier Application US 09/205,217 (CIP) Filed on 4 December 1998 (04.12.98)			
(71)(72) Applicants and Inventors: HESS, Markus [DE/DE]; Schillerstrasse 53, D-10627 Berlin (DE). LUDWIGS, Michael [DE/DE]; Falkenhagener Strasse 33, D-13585 Berlin (DE).			
(74) Agent: BAUER, Wulf; Bayenthalgürtel 15, D-50968 Köln (DE).			

(54) Title: AN ENDOSCOPY ILLUMINATION SYSTEM FOR STROBOSCOPY

## (57) Abstract

An endoscopy illumination system with a light-emitting element placed at the tip of an endoscope (32) is disclosed. Pulses of light illuminate moving parts of the human body, enabling an observer to obtain information about the dynamical behavior of intracorporal structures, including vocal fold oscillations. An electronic control unit, which may obtain frequency and phase information from a microphone detecting the sound of an examinee's voice, generates light pulses for stroboscopy. The light-emitting elements (25) are over-modulated light emitting diodes in the preferred embodiment. The endoscopy illumination system may be powered by batteries, rechargeables, or transformers. When image capture devices, including CCD and CMOS cameras, are used to record video images, electronic gating circuits activate the light-emitting elements, resulting in improved imaging.

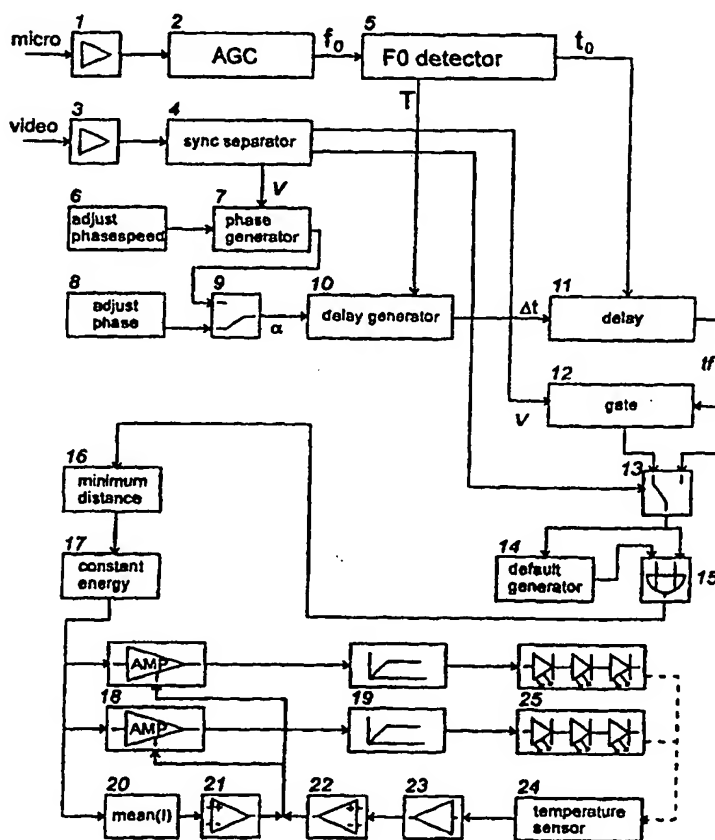

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

## AN ENDOSCOPY ILLUMINATION SYSTEM FOR STROBOSCOPY

## BACKGROUND OF THE INVENTION

The present invention relates to endoscopy, and in particular to an endoscopy illumination system wherein (i) illumination is based on (stroboscopic) light pulses using at least one light-emitting element (e.g., a light emitting diode - LED) to obtain illumination of intracorporal structures, including the vocal folds, and where (ii) the light-emitting elements are powered and controlled by an electronic control unit within the endoscopy illumination system comprising features to obtain stroboscopic imaging.

In order to provide background information so that the invention may be completely understood and appreciated in its proper context, a short paragraph is given to acknowledge important inventions in the history of endoscopy of the larynx, and particularly stroboscopy, and reference is made to a number of prior art publications and patents.

Historically, the visualization of the inner parts of the body is referred to as endoscopy. Laryngoscopy specifically refers to the visualization of the larynx, which contains the sound producing vocal folds (also called vocal cords). Visualization of the larynx was first described by Garcia in the middle of the 19<sup>th</sup> century when he used a mirror placed in the pharynx to observe vocal fold motion. For the past hundred years, the use of mirrors has been considered routine for laryngologists. The rapid vibrations of the vocal folds cannot be detected using continuously emitting light sources, because typical frequencies for voice production ranging from 70Hz up to 400Hz are too fast for our eyes to see. The technique of stroboscopy allows the physician a clear view of the vocal folds, even when they are vibrating rapidly. In 1878, Oertel used a device to visualize the rapid vocal fold motions during sound production (phonation) through the use of stroboscopy techniques. Since then, three major image routing

**CONFIRMATION COPY**

techniques were - and currently still are - used clinically to help visualize the vocal fold motions via stroboscopy: (a) indirect observation with a mirror held into the pharynx of the examinee and illumination provided by an external light source, (b) intrapharyngeal placement of a rigid endoscope (also called a telescope) through the mouth (transorally), whereby the telescope contains an optical apparatus with lenses and mirrors as well as light conductors for illumination of the pharynx and larynx, and (c) the use of a fiberscope, with its far end also placed within the pharynx, but routed through the nasal cavity (transnasally), whereby the fiberscope contains an optical compartment for image transmission as well as glass fiber light conductors for illumination. In all three techniques, illuminating light is provided through extracorporeal light sources.

For non-moving anatomical structures, color images are preferred clinically because they contain more information than monochrome images. For the examination of dynamic features, e.g., the vibration patterns of the vocal folds using stroboscopy, monochrome images with high gray scale resolution are considered sufficient. Numerous publications considering dynamic behavior of the vibrating vocal folds are based on black and white imaging. A historical overview of stroboscopy from the perspective of a clinician is given in an article by J. Wendler (Stroboscopy. Journal of Voice, Vol.6 No.2, pp 149-154, 1992, Raven Press, New York). Although the technique of stroboscopy has been known and used for more than a hundred years, stroboscopy systems still are heavy, large, and expensive to build.

Because LEDs are used for illumination in the preferred embodiment of this invention, some features may be pointed out in advance. Energy supplying elements, such as batteries, are capable of powering an electronic circuit as well as an illumination source, e.g. LEDs. LEDs are also a quite cheap light source (a red LED with very bright light emission presently costs about 0.80 US\$). Light intensity is mainly dependent on current flow, and usually an upper current threshold - for continuous light emission purposes - is typically at 20

Milliamperes (mA). More precisely, a continuous current of 20mA will not destroy the LED. Continuously applied higher currents, say, 50mA or 60mA, may lead to higher light energy output, but also to a reduced life span of minutes, or seconds. To give an example of a possible limitation, we tried to find out where a maximum may be reached for a specific LED type. In so-called ultra bright red LEDs, the life span was less than five minutes when 60mA were continuously applied. However, pulsed loading of the LEDs with much higher currents is well tolerated.

German Pat. No. DE 3,432,018 to Nagasaki et al., US Pat. No. 4,816,909 to Kimura et al., US Pat. No. 5,363,135 to Inglese disclose the use of light emitting diodes arranged in the tip part of the insertable part of an endoscope to provide illumination for imaging, more specifically, to adjust for image sensor device - specific conditions and requirements, such as adjustment for pixel numbers, spectral characteristics, and image colour separation. However, the above mentioned inventions do not teach and cannot be applied to obtain stroboscopy illumination, because no triggering parts including a frequency detecting device (e.g., for the human voice) are incorporated. Furthermore, the above mentioned inventions do not provide means for matching single pulses of light with individual frames in a camera system. Stroboscopy features prominent in the present invention are therefore not anticipated in the abovementioned patents.

Whatever the precise merits, features and advantages of the above cited references and prior art, none of them achieves or fulfills the purposes of the present invention. A principal object of the present invention is a system for stroboscopic endoscopy that is small, light weight, and inexpensive to build. The prior art devices fail to be satisfactory, because they do not utilize the advantages of pocket-sized electronics, are not power outlet independent, are not portable for hand-held examinations, are not cheap to build, and do not provide to match light pulses to the active frame intervals of image recording systems, as is all provided in the

present invention. Customly available light sources for clinical rigid and flexible stroboscopy are heavy (they weigh more than 5kg), they are all power outlet dependent, and they are mostly based on xenon or halogen light emitting bulbs with far more than one hundred Watts of energy consumption, leading to heat emission undesirable for endoscopy, and cost at least 5,000 US\$. The main prerequisites for future clinical needs of small sized, light-weight, and inexpensive stroboscopy devices (Wendler, 1992) are still not met.

It is another principal object of the present invention to provide an electronic control unit within the endoscopy illumination system with characteristics that will enable achievement of sufficient illumination of the objects inside the body. Among the features necessary for stroboscopy are short light pulses with high intensities, rapid increase and more rapid decay than xenon light bulb flashes, machine-set fixed and/or externally triggered flashing capabilities from lower than 100Hz up to more than 400Hz. All above mentioned features are realized in the present invention.

It should be noted that use of inexpensive, detachable light-emitting elements, such as LEDs for diagnostic procedures, may have the additional potential of being used only once. Single-use light-emitting elements could reduce costs by avoiding the need for special sterilization procedures.

Another object is to provide a device that can be disassembled quickly and easily for transportation to an examination site, such as in a bedside patient examination procedure, or quick follow-up examination outside the office site, and that allows for more practical screening of a large population. The availability of an inexpensive and versatile stroboscopic endoscope could have a positive impact on the health of many people in developing countries.

To avoid double exposures, it is important that the illumination source flash only once per video frame. The electronic control unit of the present invention may be designed to

ensure that only one flash accompanies a single image acquisition, thus avoiding double exposures and the resulting blurred images during stroboscopy recordings.

The abovementioned features can all be realized, when our endoscopy illumination system is used in combination with ultra bright LEDs within its light-emitting element.

#### BRIEF SUMMARY OF THE INVENTION

The principal object of the present invention is to provide an endoscopy illumination system comprising light-emitting elements such as light emitting diodes, driven by an electronic control unit. The system should be light-weight, easily portable, pocket-sized, power outlet independent, easy to handle, and inexpensive, while also providing sufficient illumination for stroboscopy purposes. Pulsed light from said light-emitting element, powered and controlled by said electronic control unit, provides adequate light pulse emissions for direct visual examination, as well as adequate illumination, when image processing devices, including solid state cameras, CCD and CMOS, and image recording systems are attached.

#### BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWING

The following figures will illustrate a preferred embodiment of the present invention.

Figure 1 is a schematic diagram of the endoscopy illumination system.

Figure 2 is a bottom view of the light-emitting element specifying the LED positions at the tip of a rigid endoscope in this preferred embodiment.

Figure 3 is a top view of the light-emitting element showing the silicone embedding connecting wires of the LEDs.

Figure 4 is a frontal view of the light-emitting element with lateral LED positions at the tip of a rigid endoscope.

Figure 5 is a perspective view of another embodiment of the endoscopy illumination system prior to assembly.

## DETAILED DESCRIPTION OF THE INVENTION

Refer now to Fig. 1, which is an overall schematic drawing of a preferred embodiment of the invention. We will first describe the electronic control unit with its different components, followed by a description of the light-emitting element.

### a) Electronic control unit

Within the electronic control unit, two input signals are processed: a microphone signal from microphone 40 and a video signal from an image capture device in the form of a camera 42. During stroboscopy, voicing of an examinee leads to an acoustic output which is recorded with microphone 40. The microphone signal is amplified by a high impedance amplifier (1) for use with crystal or electret microphones. The output signal is routed to an automatic gain control (AGC) module (2). This module reduces both rapid and slow fluctuations of amplitude (normalization of shimmer). By the use of different time constants for the initial signal onset (high and rapid response for amplification) and for the stable phase of phonation (lower and slower response for amplification) a signal of nearly constant amplitude is obtained, as is required for satisfactory stroboscopy triggering. The F0-detector (5) receives the signal from the AGC module (2), separates the fundamental frequency, and generates a signal T, where the amplitude is proportional to the period of the fundamental frequency. T is fed into the delay generator (10), which will be described later. The F0-detector (5) also generates a pulse train signal t0 in synchrony and phase-locked with the incoming microphone signal (accordingly, t0 is a voice-related, triggered, pulsed output signal). The signal t0 is fed into the delay module (11). This delay module delays each incoming pulse of t0 by  $\Delta t$ , which is the time delay for an angle alpha for a given frequency F0 (signaled from the delay generator



(10)) and produces an output signal  $tf$ . The pulses of  $tf$  appear each time when  $F0$  passes  $\alpha$  ( $\alpha$ ). This signal  $tf$  now has the required firing pattern for stroboscopy. Special requirements have to be followed when video imaging is used, as we now explain.

The video signal from an image capture system, e.g., a CCD camera, is routed through an impedance converter (3) and fed into a synchronisation signal separator (4). The synchronisation separator (4), which may be programmed for NTSC and PAL signals, has three output signals. First, a vertical synchronisation signal  $V$  is generated. The  $V$  signal is routed to the phase generator (7), which itself produces a periodically changing signal  $\alpha$  representing the actual phase for the slow motion image presentation. The phase generator (7) is synchronised with the vertical synchronisation signal  $V$ . The phase is incremented constantly with each video half frame. The increment and period time for one complete strobe-cycle oscillation of the vocal folds (which is usually displayed at about 1 cycle per second) is controlled by a speed adjustment module (6). If a 'motionless', phase-synchronous image is desired, a signal from the adjustment module (8) is generated and routed through the switch (9). Thus, by selection of switch setting (9), the user can decide whether slow motion imaging (provided via input (7)) or a motionless, 'freeze'-like image mode (provided via input from (8)) is activated. The delay generator (10) feeds its output signal  $\Delta t$  ( $\Delta t = T \cdot \alpha / 360^\circ$ ) into the abovementioned delay module (11).  $\Delta t$  is proportional to  $T$ , which enables a frequency independent visualization of similar vocal fold oscillation phases.

The synchronisation separator (4) also puts out two other signals: one signal is directed to the gate module (12), the other to a mode switch (13). The mode switch (13) allows for manual selection of the modes EYE, CAM or AUTO. In the EYE mode, every pulse from  $tf$  is used. In the CAM mode, only the pulses selected by the gate module (12) are used. In the AUTO mode, the CAM mode is automatically selected when a video signal is present, which is sensed by the incoming signal from the synchronisation separator (4). This mode switch is

integrated to provide stroboscopy without video recording, e.g., in a bedside examination setting.

The gate module (12) regulates and limits light exposure for video frames. For an equal exposure, a constant number of light pulses (flashes) is gated for each frame. To avoid the effect of multiple exposure with different vocal fold positions, each light pulse within the same frame must be generated at the same angle  $\alpha$ . In the case of slow motion visualization of the vocal fold movements, the value of  $\alpha$  is held constant for each frame. This requirement is provided by the phase generator (7). The number of pulses depend on the frequency of the video signal and the fundamental frequency of the microphone signal. The gating module receives signals from the synchronisation separator (4) and the delay module (11). The synchronisation input signal defines the (programmable) active image acquisition period (active interval) of the CCD chip. This information is fed into the gating module (12), which is set to permit only a constant number of pulses to pass in the active interval of the CCD. All additional pulses within the same frame will be rejected from passing through to the gate module (12). The gate module (12) signal does not trigger the LEDs to flash, it rather permits or rejects voltage pulses within desirable time windows (within the active interval) to pass through. For the next active interval, signaled by a new incoming start-signal from the synchronisation separator (4), the abovementioned process starts again.

In the case that no stroboscopy signals are produced and no pulsed signals are routed through the mode switch (13), a default generator (14) generates frequent pulses to provide illumination. The default generator (14) is started whenever the time between the incoming strobe pulses from  $t_f$  exceeds a (programmable) time limit. The frequency is set according to the input requirements of the particular LEDs used (to guarantee their maximal life span). The OR-gate (15) integrates this default feature.

The modules shown at the bottom of Fig. 1 (16 - 25) regulate energy consumption, current limits, duty cycle duration, and temperature thresholds for the LEDs, and adapt the stroboscopically required light pulses of the electronic control unit to the particular LEDs employed.

The minimum distance module (16) eliminates pulses whenever the frequency of the strobe pulses are very high (e.g., higher than 500/sec) and, therefore, minimal time intervals occur (frequency limiter). This preserves the life span of the LEDs. The pulse-duration is controlled by the constant energy module (17) to reach a constant illumination exposure of the video frames and to constantly regulate the power consumption of the LEDs. The duration of a duty-cycle duration depends on the frequency  $F_0$ , but should not exceed 1 millisecond to avoid blurring of moving elements within an image. A programable power factor is used for matching the requirements of the LED types utilized. To reduce the supply voltage, a variable number of parallel current amplifiers (18) may be used. In the preferred embodiment, 4 LEDs are powered by 2 current amplifiers (18). Current limiters (19) are added to limit the current to a threshold above which additional current will not result in further light output. The setting of the current limiters depends on the type of LEDs used. The temperature of the LEDs (25) is registered with a temperature sensor (24), e.g., a thermistor, for safety reasons. Its output is amplified (23) and activates the comparator (22) in case of LED overheating, resulting in negative feedback to the amplifier (18). Another circuit concerned with safety utilizes a mean current comparator (20), which detects critical power output over time and limits the current flow in the current amplifiers (18).

#### b) Light-emitting element

Refer now to Fig. 2, 3, and 4, which show a preferred embodiment of the light-emitting element. This light-emitting element has four LEDs 25. It may be attached to the tip of an elongated part, especially a rigid endoscope 32 having a lens 33. The two power-supplying

wires 34 are routed next to the endoscope along its shaft and are connected to the electronic control unit (to the current limiters (reference number 19 in Fig. 1)). The wires of the LEDs and their connection to the wires routed to the electronic control unit are covered by a silicone cover 35, which serves four purposes: 1) electrical isolation of the wires going into the LED casing; 2) facilitation for cleaning in soluble detergents; 3) enhancement of wire stability; and 4) smoothing of the surfaces of the insertable light-emitting element in laryngoscopy settings.

The electronic control unit and the light-emitting element are powered by one or two 9 Volt batteries, depending on the voltage needed. A manual power switch allows for voltage selection (9V/18V).

With this preferred embodiment, we present an easily portable, pocket-sized, lightweight, power outlet independent, easy to handle, inexpensive endoscopy illumination system. The system allows a direct view of vibrating structures, using an acoustic signal to synchronize light pulses with vibrations. It also provides single-flash-per-frame pulsed light emissions when a CCD camera is attached. Thus, the preferred embodiment of the present invention has fulfilled the objects stated at the outset.

Figur 5 shows a cup-shaped sheath 36 made of a thin, transparent foil, e. g. polypropylene or polyethylene. This sheath is preferably a one-way article. It can be thrown away once it has been used for a medical inspection. It is completely closed at its frontal end in Figur 5, where a circular closure face 37 is provided, and is open for insertion of the elongated part, especially the endoscope 32, at the other end. It is mainly constituted by a cylindrical tube 38 and said closure face 37.

The elongated part is equipped with a holding device in the form of protrusions 43 to detachably hold the sheath once it is shifted over the elongated part (see arrow 39).

A camera 42 is detachably fixed to the tip of the elongated part. The elongated part, e.g. the endoscope, is non-rigid, it can be bent.

On an inner face of the frontal circular closure face 37 three LEDs 25 are fixed, they are connected to power supplying wires 34. The LEDs 25 are of surface mounted (SMD) type, they are glued to the inner surface of closure face 37. The LEDs are thrown away with the sheath. In an alternative embodiment the LEDs 25 are fixed to the elongated part and the sheath is shifted over the LEDs 25.

The foregoing description of the preferred embodiment of the invention has been presented for the purpose of illustration and description. It is not intended to be exhaustive or to limit the invention to the precise form disclosed. Many modifications and variations are possible in light of the above teaching. It is intended that the scope of the invention be limited not by this detailed description, but rather by the claims appended hereto.

We claim:

1. An endoscopy illumination system for supplying an illumination light to an object of examination for endoscopy purposes with a light-emitting element and an electronic control unit comprising:
  - (a) a light-emitting element, being detachable, connected to said electronic control unit and detachably attached to a tip of an elongated part insertable into a human body comprising an endoscope, said light-emitting element being directed to the object of examination, said light-emitting element comprising light emitting diodes over-modulatable in a pulsed mode, and said pulses comprising frequency-associated pulses such as for stroboscopy use;
  - (b) an electronic control unit comprising:
    - (ba) a movement-detection circuit for detecting a movement of the object of examination from signals supplied from an external source, said movement detection circuit being attached to or integrated within said electronic control unit, where said movement-related signals are further processed.
    - (bb) a delay circuit integrated within said electronic control unit, delaying pulses in a pulsed trigger signal with a controllable phase delay from  $0^\circ$  to  $360^\circ$  in relation to the movements of the object of examination, said delayed pulse trigger signal directly or indirectly activating said light-emitting element, comprising pulsed flashing modes for stroboscopy, for example to illuminate for 'motionless' phase-locked or 'slow-motion' imaging.
2. The endoscopy illumination system according to claim 1 wherein said electronic control unit comprises a gating circuit integrated within said electronic control unit gating said delayed pulsed trigger signals from said delay circuit according to an input signal received from a detachably connected image capture device, whereby pulsed signals from said delay

circuit are gated for pulses within desired active image acquisition phases of said image capture device, and where the gating circuit output signal activates said light-emitting element, resulting in improved imaging, including prevention of interference patterns on an image display device and avoiding streak formation on an image screen.


3. The endoscopy illumination system according to claim 2 wherein said pulsed signals from said delay circuit are gated for pulses within desired active image acquisition phases of said image capture device, and where a constant illumination of image frames is provided by the number of illuminating flashes.
4. The endoscopy illumination system according to claim 1 wherein said electronic control unit comprises a gating circuit integrated within said electronic control unit gating said delayed pulsed trigger signals from said delay circuit according to an input signal received from a detachably connected image capture device, whereby pulsed signals from said delay circuit may lead to more than one illuminating flashes within one image frame, but only when similar oscillation phases are present, i.e., the oscillating object may only be illuminated at the same position.
5. The endoscopy illumination system according to claim 1 wherein said electronic control unit comprises an automatically activated electrical default generator circuit integrated within said electronic control unit generating a signal to provide illumination within time intervals where no triggering signal is present.
6. The endoscopy illumination system according to claim 1 wherein said electronic control unit comprises an automatically activated switch integrated within said electronic control unit enabling pulse triggered illumination or default generator circuit illumination in the case no image capture device is attached or integrated to the electronic control unit.
7. The endoscopy illumination system according to claim 1 wherein said electronic control unit comprises a circuit integrated within said electronic control unit to over-modulate said

- LEDs in said light-emitting element, providing and controlling maximum energy output for duty cycles and also providing and controlling mean energy consumption over time, preferably including means for improving safety and reliability such as low pass filtering, light-emitting element temperature control, current limiting, and voltage limiting.
8. The endoscopy illumination system according to claim 1 wherein said endoscopy illumination system includes intracorporal and/or extracorporal light-emitting element positions, where extracorporal light is routed by means of a conductor into the body, comprising extracorporal light emitting diode(s) connected to at least one glass fiber cable.
9. The endoscopy illumination system according to claim 1 wherein said endoscopy illumination system utilizes related semiconductor elements such as laser diodes and light emitting diodes with invisible light.
10. The endoscopy illumination system according to claim 1 wherein said endoscopy illumination system utilizes either power-outlet-dependent and/or power-outlet-independent energy supplying elements including, but not limited to: batteries, rechargeables, and transformers.
11. The endoscopy illumination system according to claim 1, wherein a tip mounted CCD or CMOS camera is detachably attached to said elongated part.
12. The endoscopy illumination system according to claim 1, wherein said external source comprises microphone-related signals or electroglottography-related signals.
13. The endoscopy illumination system according to claim 1, wherein a sheath made of thin material is provided, said sheath has a closed transparent end and can be shifted over the elongated part.
14. The endoscopy illumination system according to claim 13, wherein said sheath has an inner surface, the light emitting diodes (LED) are attached to said inner surface.






1/3

Fig. 1

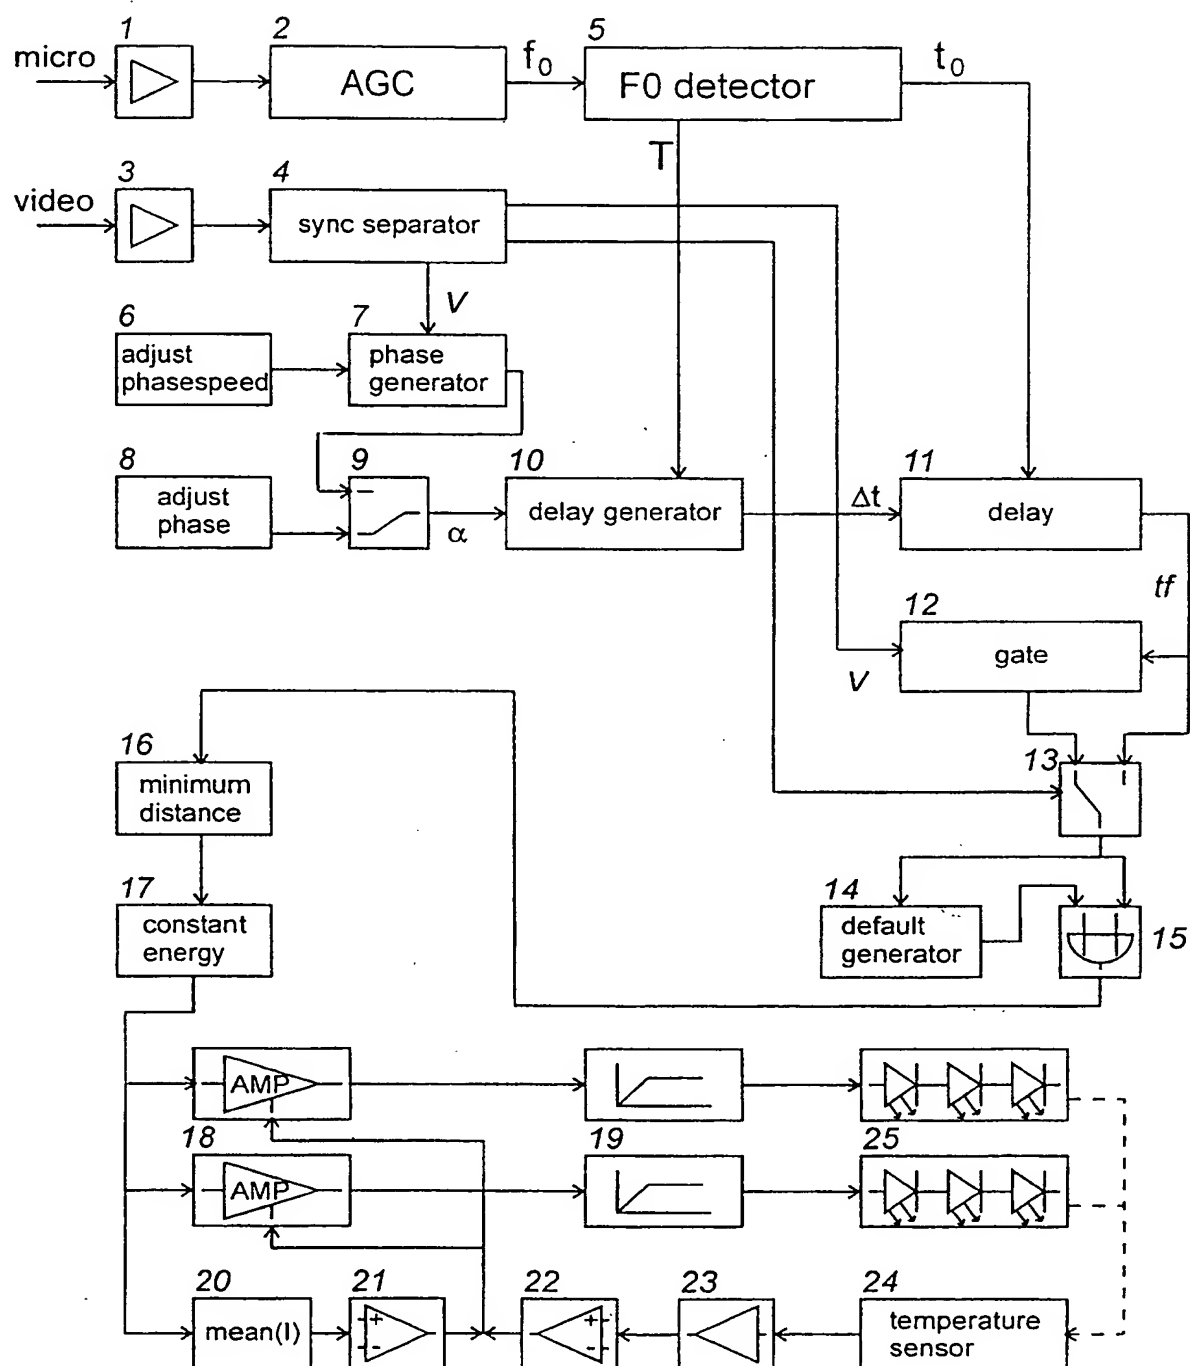


2/3

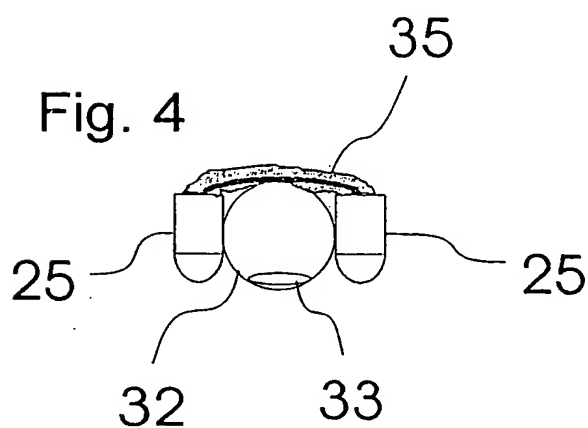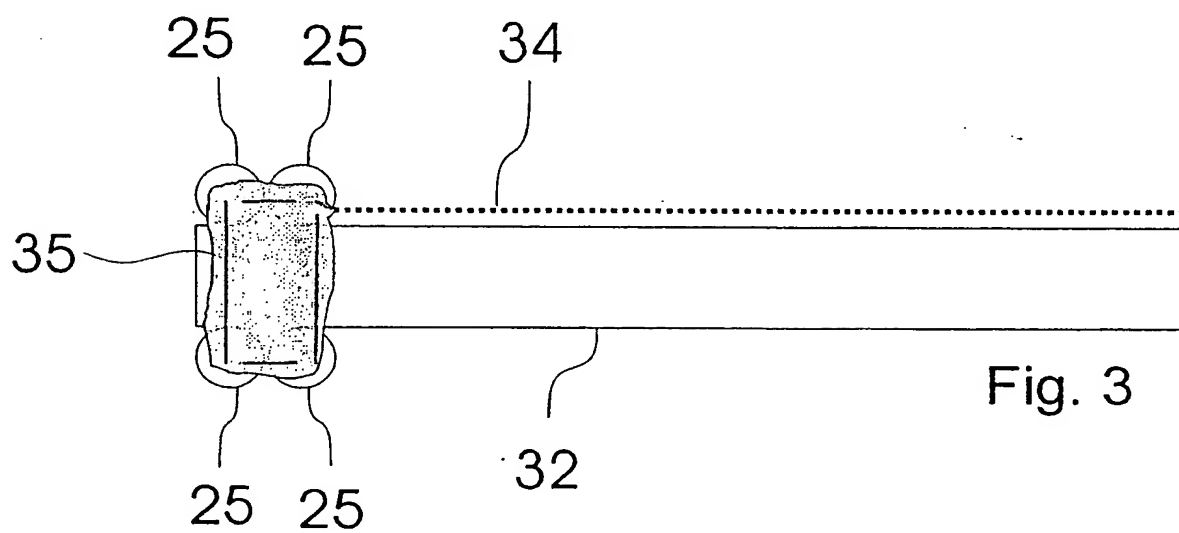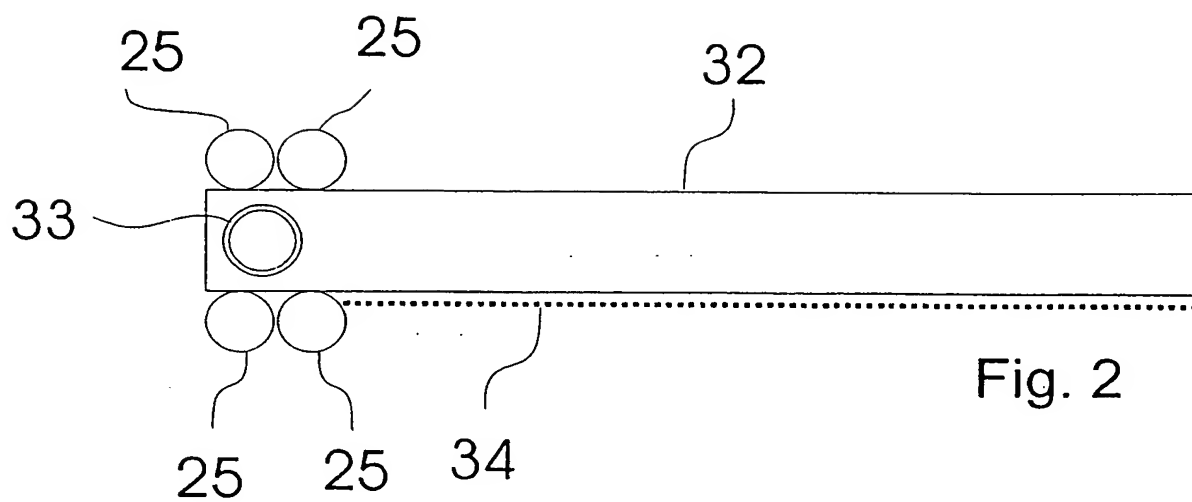

3/3

Fig. 5

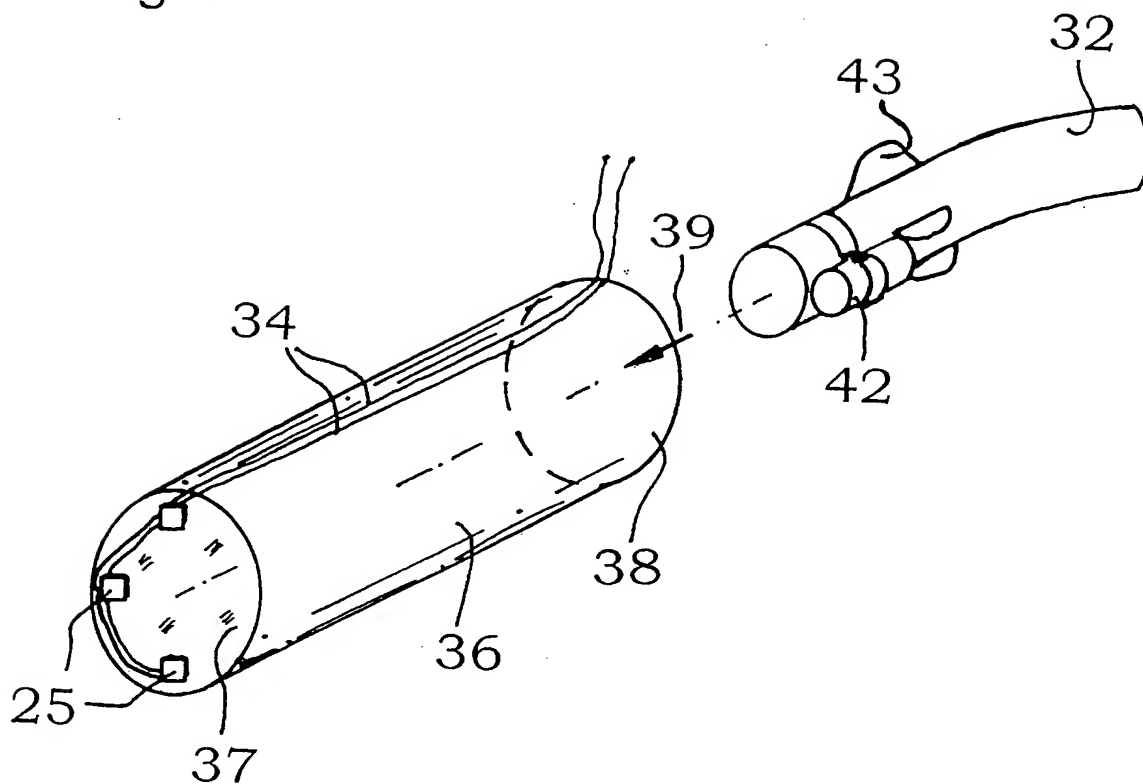

# INTERNATIONAL SEARCH REPORT

national Application No

PCT/EP 99/09468

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 A61B1/267

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A61B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 4 807 291 A ( R. HOFFMANN ET AL ) 21 February 1989 (1989-02-21) column 3, line 13 - line 38	1-3, 11, 12
A	column 5, line 7 - line 19	4, 7, 9, 10
Y	DE 25 50 912 A ( VEB TRANSFORMATOREN- UND RÖNTGENWERK HERMANN MATERN ) 24 June 1976 (1976-06-24) page 5, line 4 - line 28 page 6, line 7 -page 8, column 13	1-3, 11, 12
Y	US 4 273 959 A ( KOJI TUDA ET AL ) 16 June 1981 (1981-06-16)	1-3
A	column 1, line 63 -column 2, line 48 column 3, line 15 -column 6, line 27 — -/-	4-12

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

31 March 2000

Date of mailing of the international search report

06/04/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3018

Authorized officer

Geffen, N

## INTERNATIONAL SEARCH REPORT

National Application No

PCT/EP 99/09468

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	DD 96 396 A ( J. WENDLER ET AL )	1-3
A	20 March 1973 (1973-03-20) column 3, line 49 -column 4, line 49	4-12
A	EP 0 865 759 A ( SOPRO ) 23 September 1998 (1998-09-23) the whole document	1-14

# INTERNATIONAL SEARCH REPORT

Information on patent family members

national Application No

PCT/EP 99/09468

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 4807291	A	21-02-1989	DE 3536972 A	23-04-1987
			FR 2588743 A	24-04-1987
DE 2550912	A	24-06-1976	DD 115847 A	20-10-1975
			DK 552975 A,B,	19-06-1976
US 4273959	A	16-06-1981	JP 1358845 C	13-01-1987
			JP 54069279 A	04-06-1979
			JP 61020296 B	21-05-1986
			DE 2849429 A	31-05-1979
DD 96396	A	20-03-1973	NONE	
EP 0865759	A	23-09-1998	FR 2761171 A	25-09-1998